
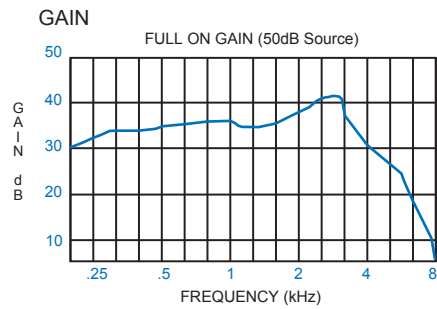



Independence RITE₂-168 ANSI Test Data

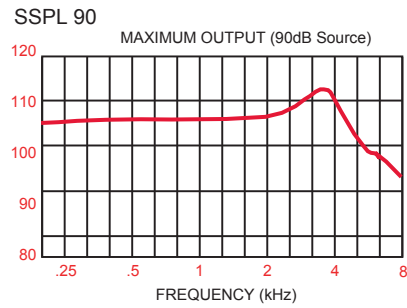

SPECIFICATION		
MAX SSPL 90	112 dB	± 3
HFA SSPL 90	106 dB	± 3
MAX FOG	40 dB	± 3
HFA FOG	35 dB	± 3
THD 500 Hz	≤ 1.5%	MAX
800 Hz	≤ 1%	MAX
1.6 KHz	≤ 1%	MAX
EIN	≤ 25dB	MAX
BATT. DRAIN	1.35 mA	MAX